

RC-5 - Performing Reset

Why reset the RC-5?

In the event that the Topcon RC-5 remote will not pair with a total station or Bluetooth communication is problematic, resetting the RC-5 initializes the Bluetooth module, returns all parameters to default and resets pairing. The serial number and Bluetooth module power settings remain unchanged.

What you will need

- RC-5 to be reset with a charged battery.


Keywords

PS Series, RC-5, DS Series, SX Series, bluetooth, DX Series, Pairing, reset



Resetting the RC-5

- While holding the FAR button and the SEARCH button, press the POWER button to switch the RC-5 on. Release the POWER button and continue holding the FAR and SEARCH buttons for about 10 seconds until the beep sounds 3 times. Then release both buttons.

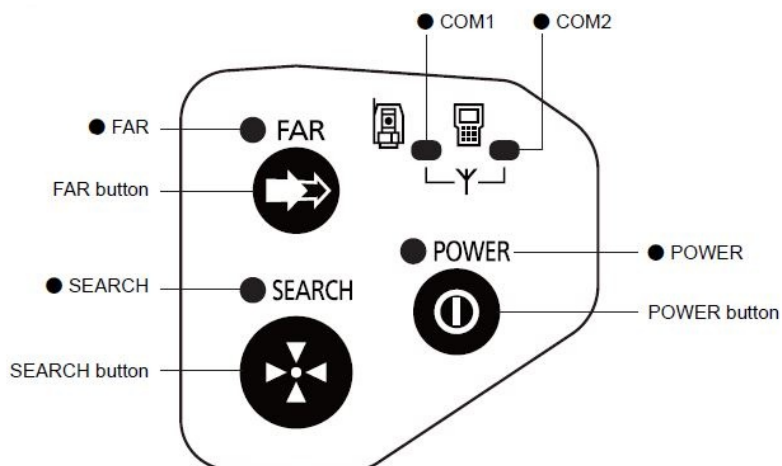

- Press and hold the FAR button for about 10 seconds. When the beep sounds several times release the button. The two com LEDs will be lit and the FAR and SEARCH LEDs will blink while the RC-5 is in reset mode. For more information, visit TopconTotalCare.com

unit performs the reset. The beep will sound several times followed by a short pause and another single beep. This signifies the operation is complete and the RC will automatically return to normal functioning.

- Turn off the RC-5. It is now ready to be paired to a total station.

Included Images

View the full-size images at the [Topcon Totalcare](#) site.

